



Common Name

Range Studio/Broadcast/Stage

Retail Price Band Over \$1000

Related Items

The C 414B-ULS has a well-deserved reputation for flawless performance and uncommon flexibility in the most demanding studio and concert sound applications.

Accessories

Included XLR-3M

Optional B18 battery supply unit, N62E, N66E power supplies

Electrical Characteristics

Frequency Response	20Hz - 20kHz
Output Sensitivity	12.5mV/Pa
Max SPL	140dB - 0.5% THD
Self Noise (CCIR)	25dB
Self Noise (DIN/IEC)	14dB-A
Output Impedance	180Ω
Recommended Load	1.0kΩ
Powering	Phantom 12-48
Supply Current	2.0
Alternative Powering	


Switchable Options

Pad	10dB, 20dB
Filter/EQ	75Hz, 150Hz, 12dB/oct


Physical Characteristics

Connector	XLR-3M
Connector Notes	
Available Colours	Non-reflective black
Weight	320g (11.27oz)
Length	141mm (5.55")
Min Diameter/Width	
Max Diameter/Width	45mm (1.77")
Depth	35mm (1.38")


Frequency curve: Hypercardioid

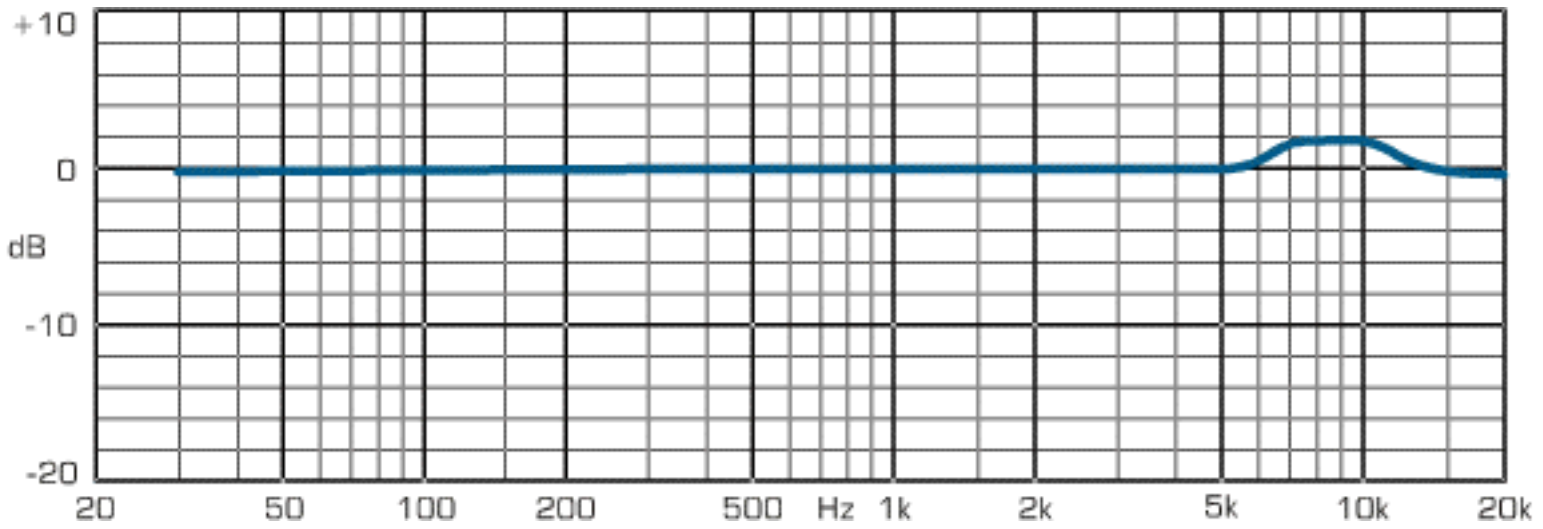


Polar curve: Hypercardioid

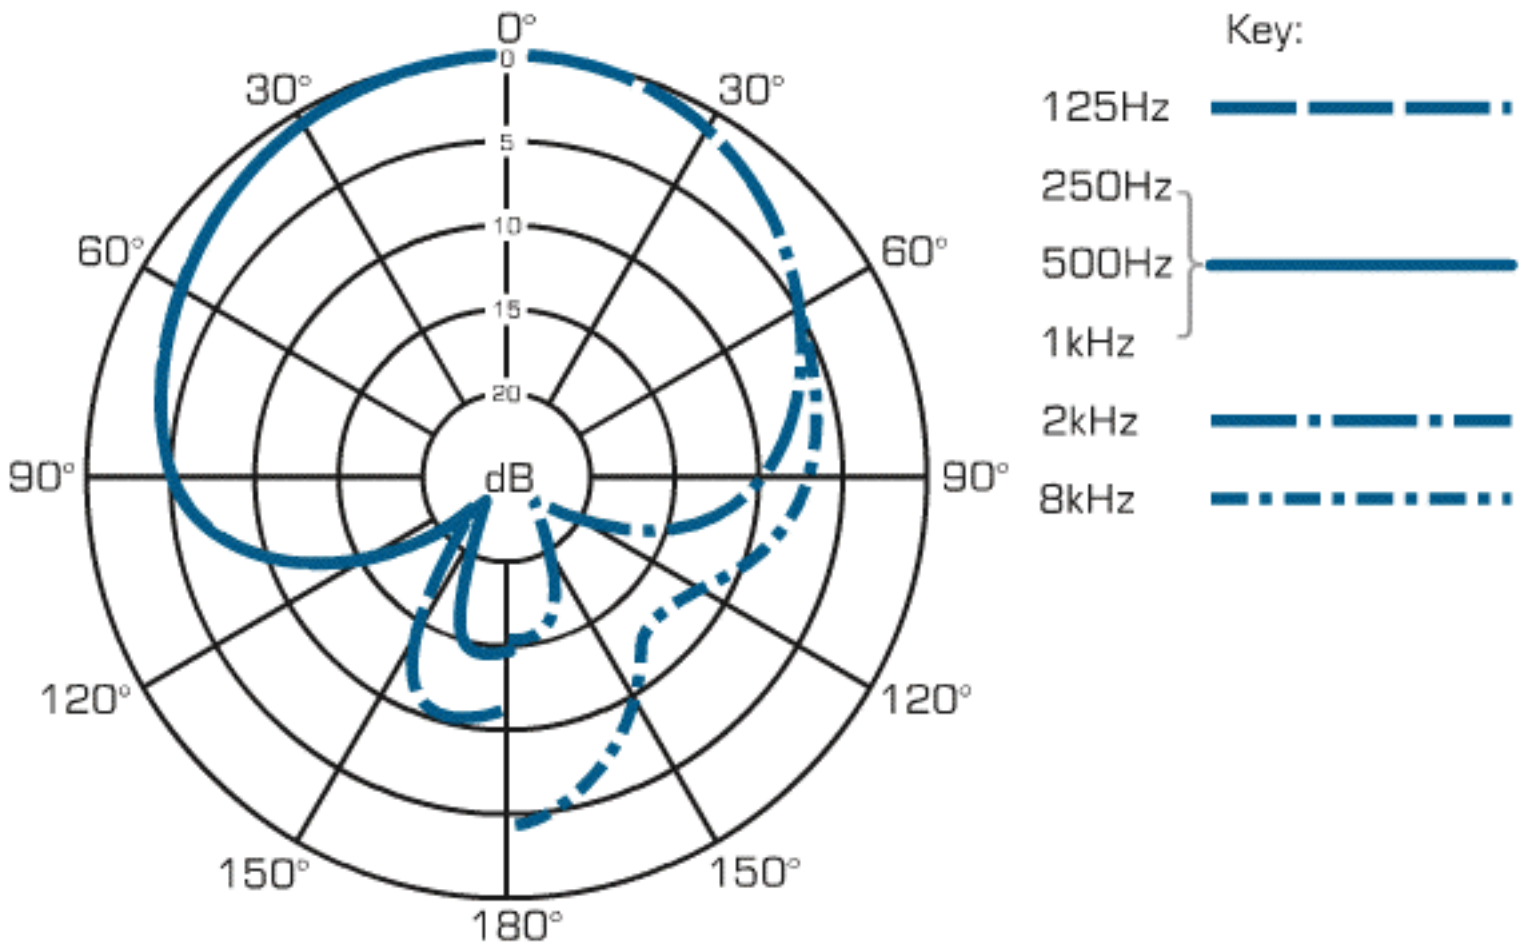


Frequency curve: Omni

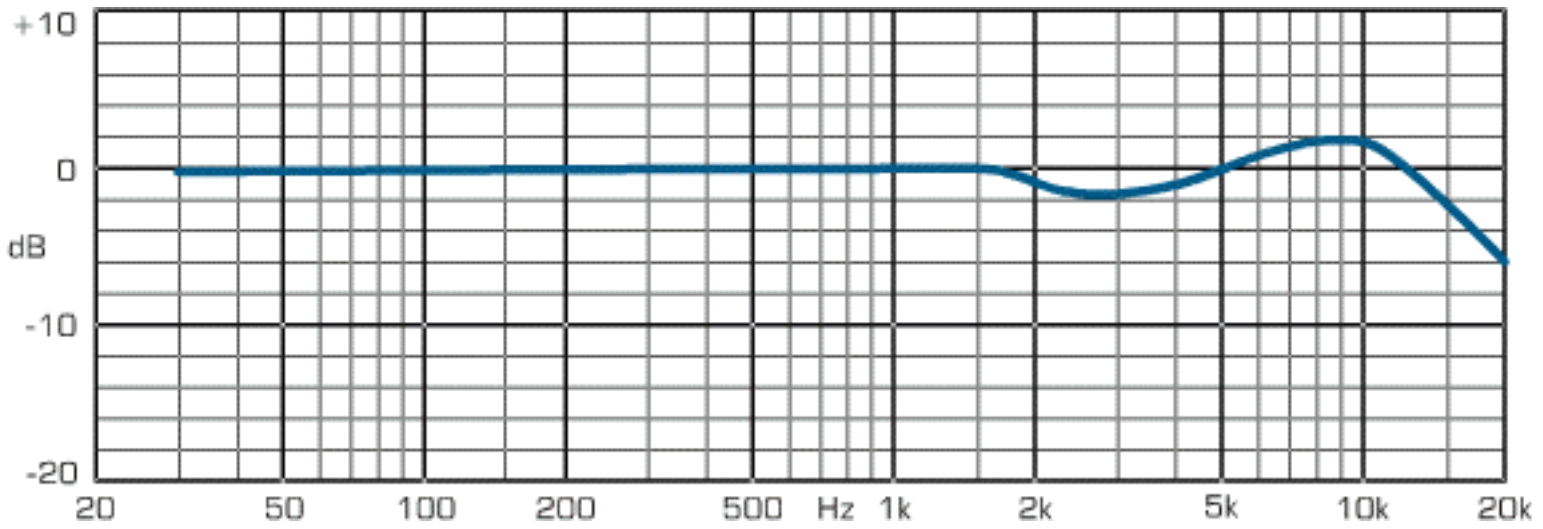


Polar curve: Omni

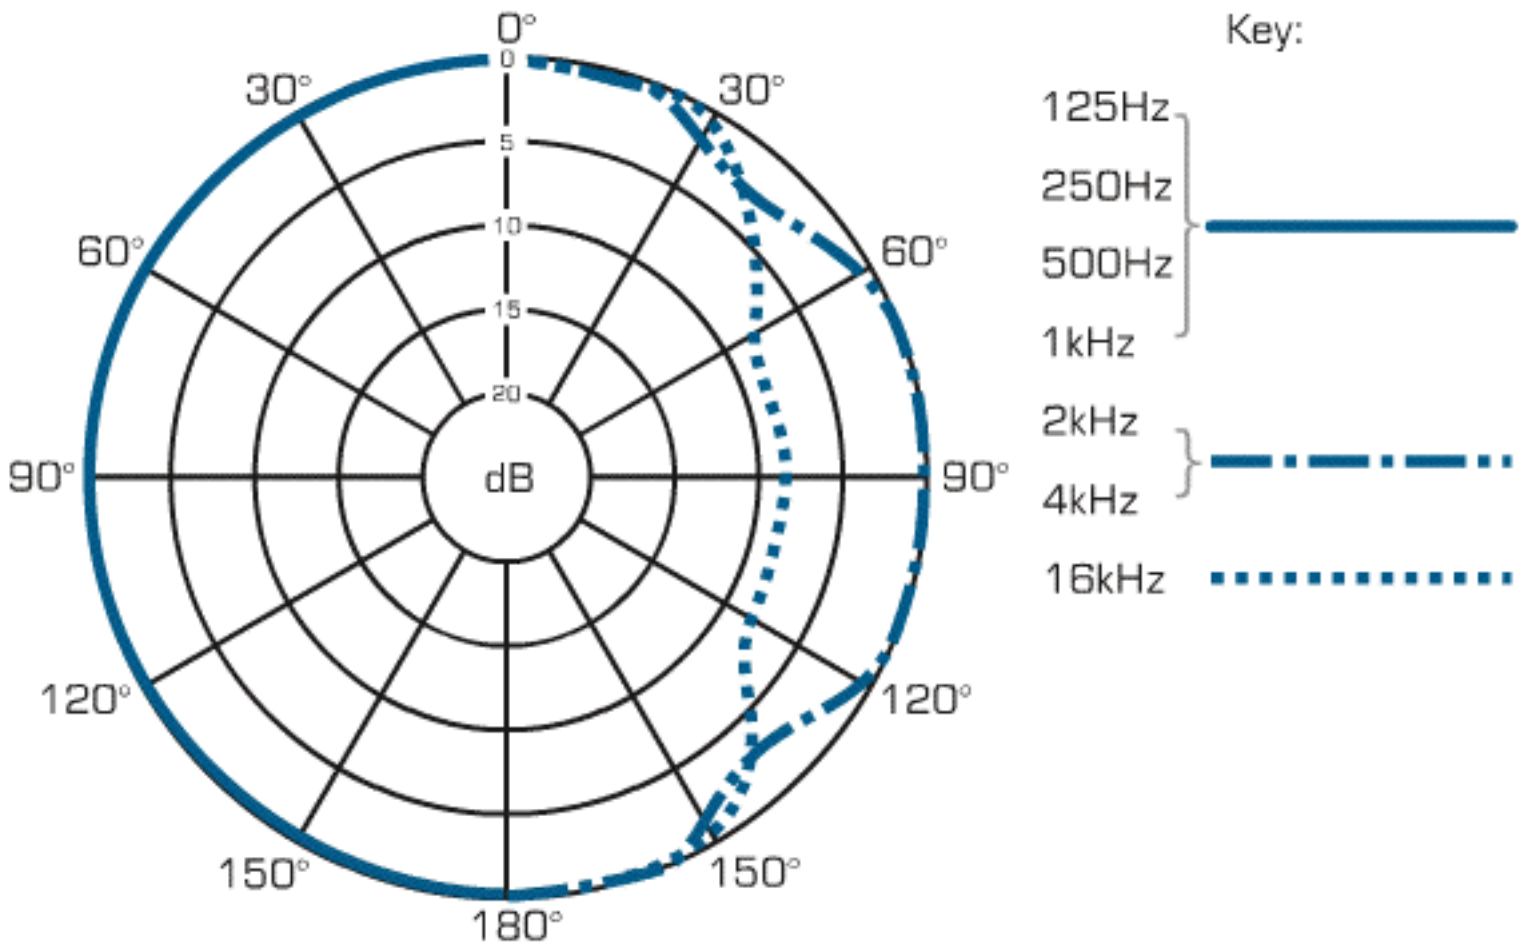


Frequency curve: Cardioid

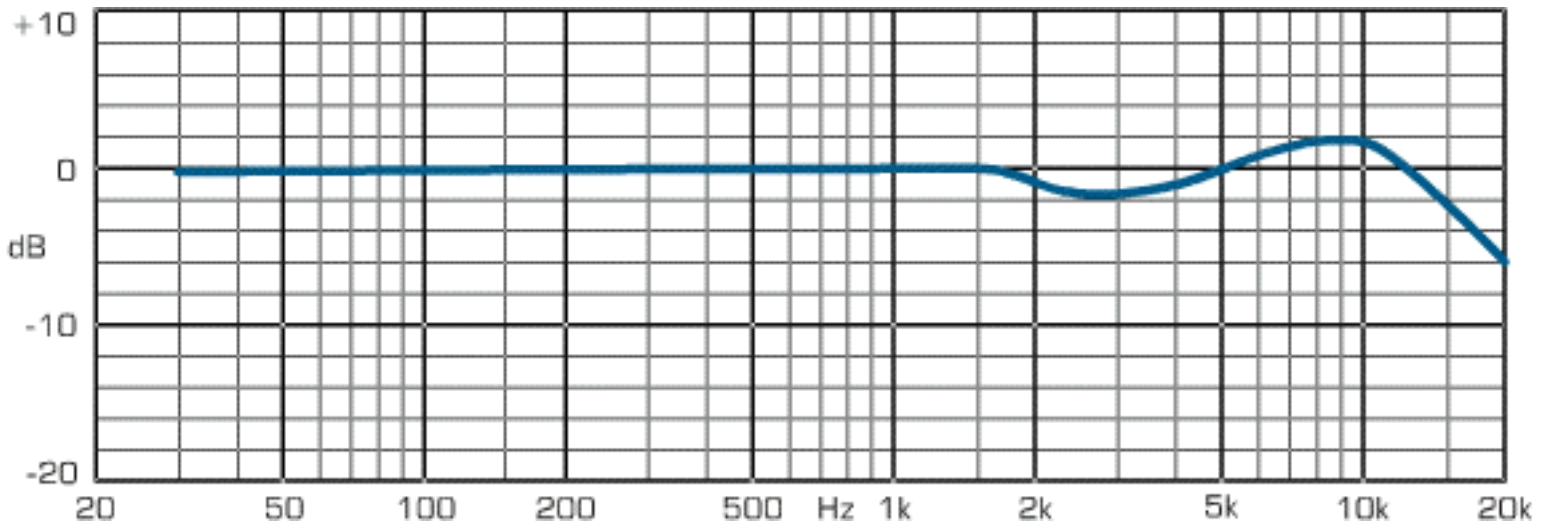

Polar curve: Cardioid

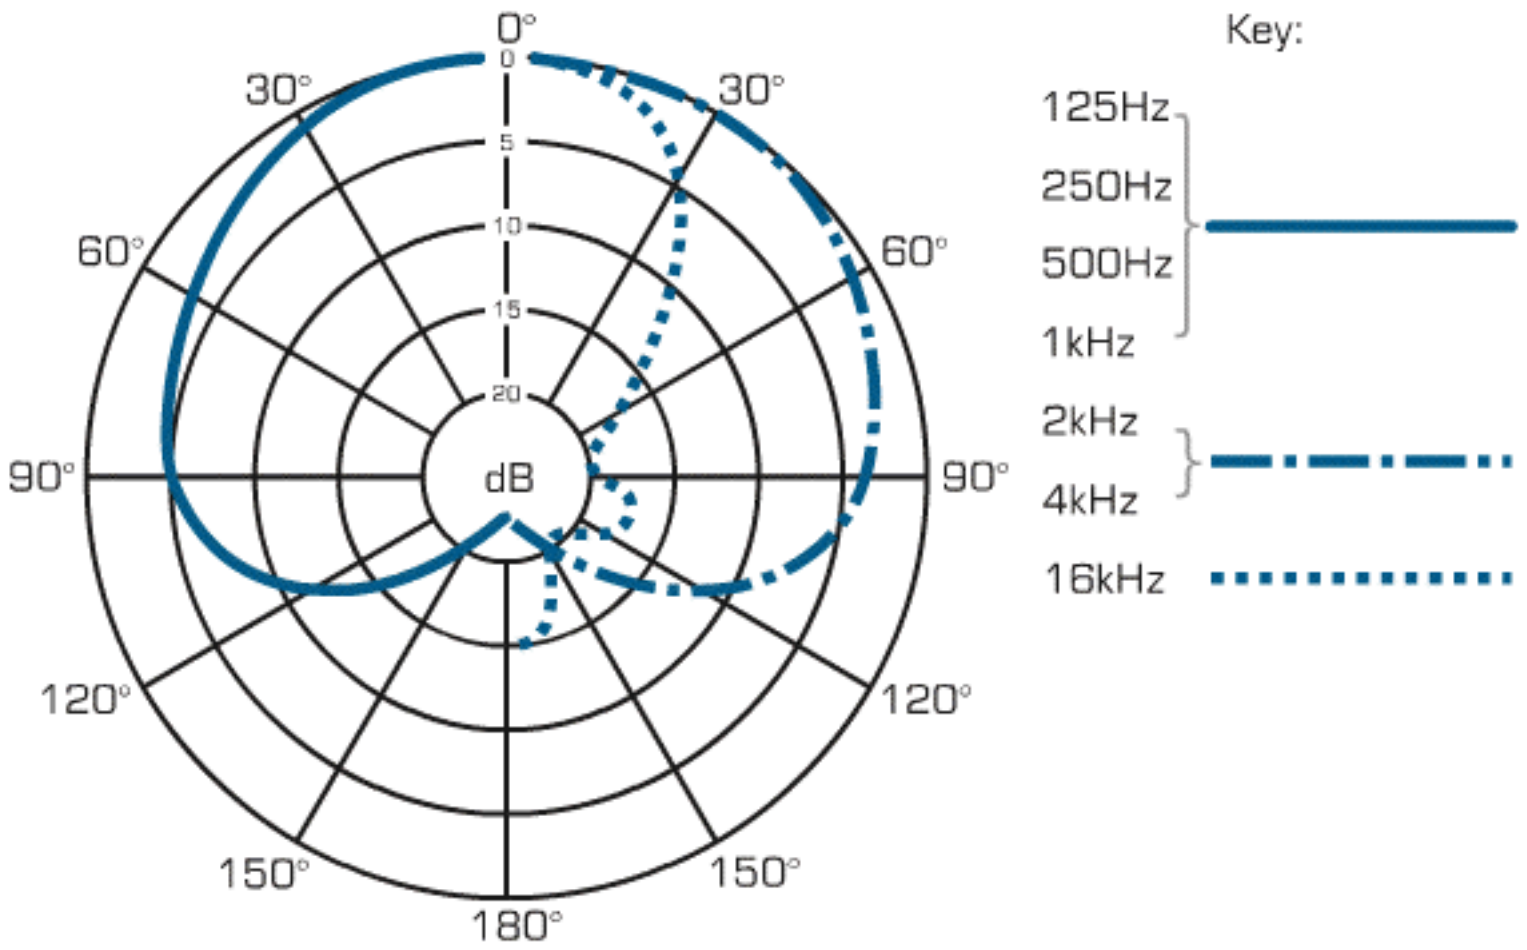

Frequency curve: Figure of 8

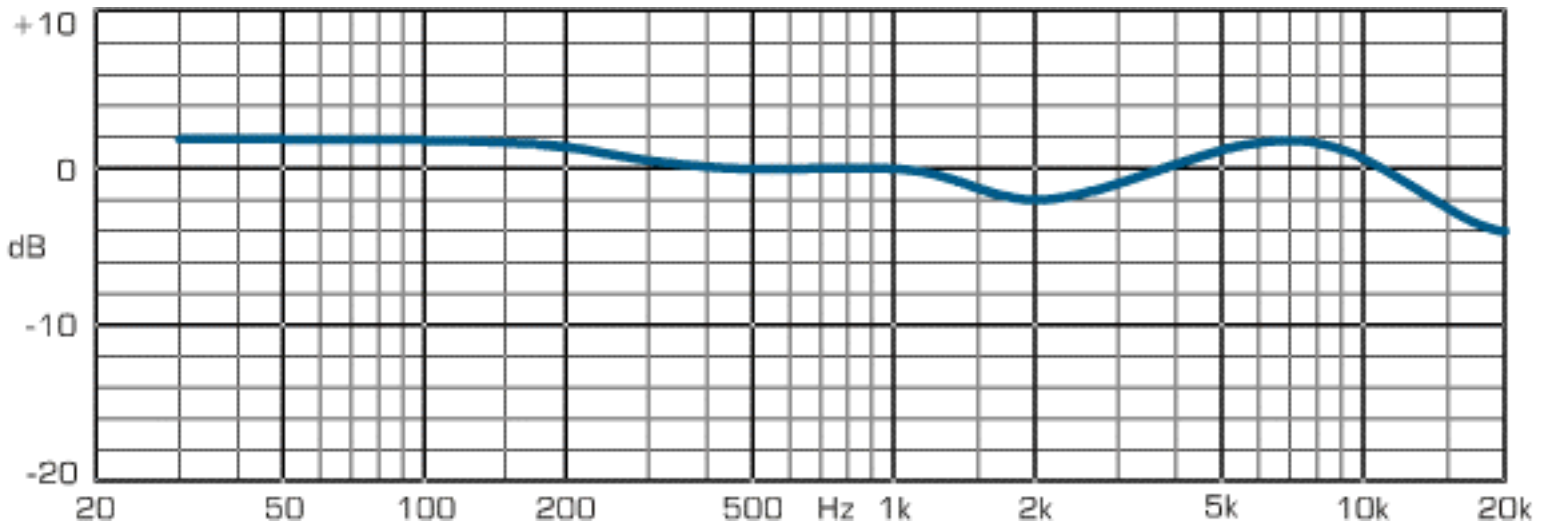

Polar curve: Figure of 8

